



Technical Data

Specification & Capacities

SPX1275CDH-2

S.N: _____



26,2kW / 35HP



4,9-17,7m



7500kg



EN 13000

[m] [kg]



SPX1275CDH-2







SPX1275CDH-2









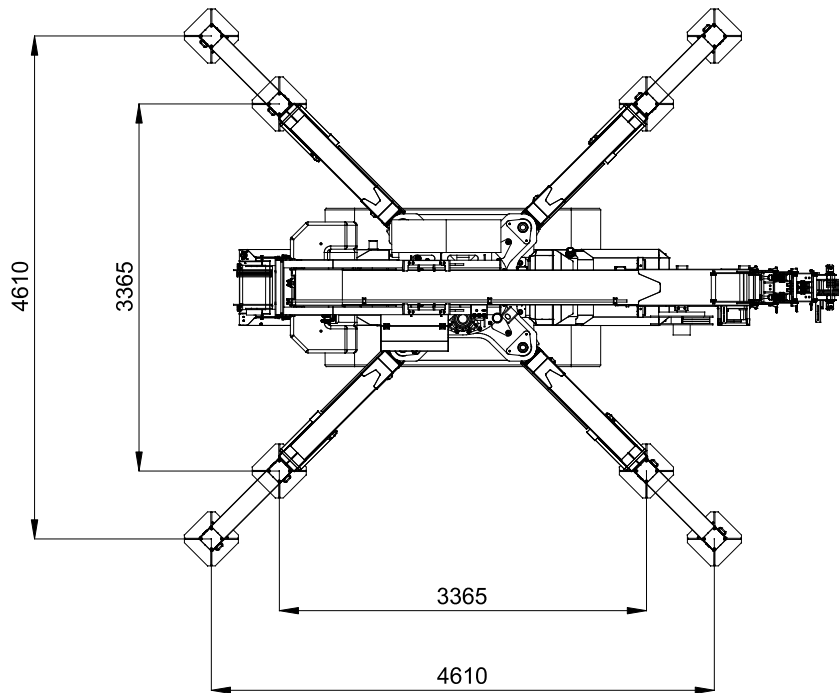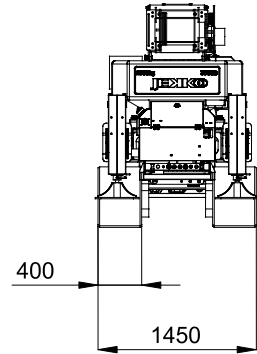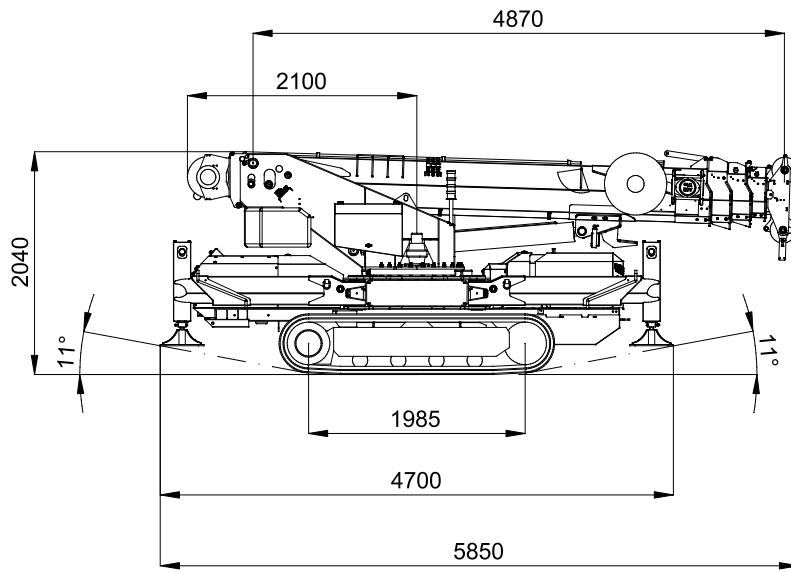

Via Campardone, 1
31014 Colle Umberto – Italy
Tel. +39 0438 1710083
Mail: info@jekko.it
Web: www.jekko.it













Date	Apr. 11 th 2018
REV.	1

SPX1275CDH-2 - OVERALL DIMENSIONS



WEIGHTS		Name / version	kg ¹
		CDH-2	6800
		CDH-2	1500
		SINGLE FALL	42
		MULTIPLE FALL	110
		PP220-8D	120
		PP400-11D.V	140
		3500G	70
		1500.1FL	265
		1500.3HL	675
	300GR	245	
	HA-SPX1275	40	
	WUK-04	3	

- 1: Dry weight
- 2: Engine working limit
- 3: Static lifting

ENGINE		KUBOTA V1505-E3B	
		26,2kW 35HP	
		DIESEL	
		L	20,0
HYDRAULIC		ISO 6743-4:HFDU with VG46 viscosity class	
		Working temp	<70°C
		L	130
MOVEMENTS		km/h	0,8 / 1,6
		20° (36%) ²	
		kg/cm ²	0,72
		kg	6800 ³
		0°/75°	
		s	35
		360°	
		rpm	1,0
		m	4,9 - 17,7
s		40	


HOIST PERFORMANCE	Winch	Layer	Max line pull	Standard rope speed	Highest rope speed
			kg	m/min	m/min
		1	2072 ¹	46,4	83,5
		2	1893 ¹	50,7	91,4
		3	1743 ¹	55,1	99,3
		4	1615 ¹	59,5	107,2
	5	1504 ¹	63,8	115,1	
	Rope	Wire rope	Ø	Total lenght	Max load
			mm	m	kg
		19x7 right lang lay Non rotating	10	125	1890
Hook block	Load	N° of		Block type	
	kg	Sheaves	Lines		
	7500	3	6	Multiple fall block	
	7500	3	5		
	6000	2	4		
	4500	2	3		
	3000	1	2		
	1500	-	1	Single fall block	






¹:LMI limited at 1500 kg

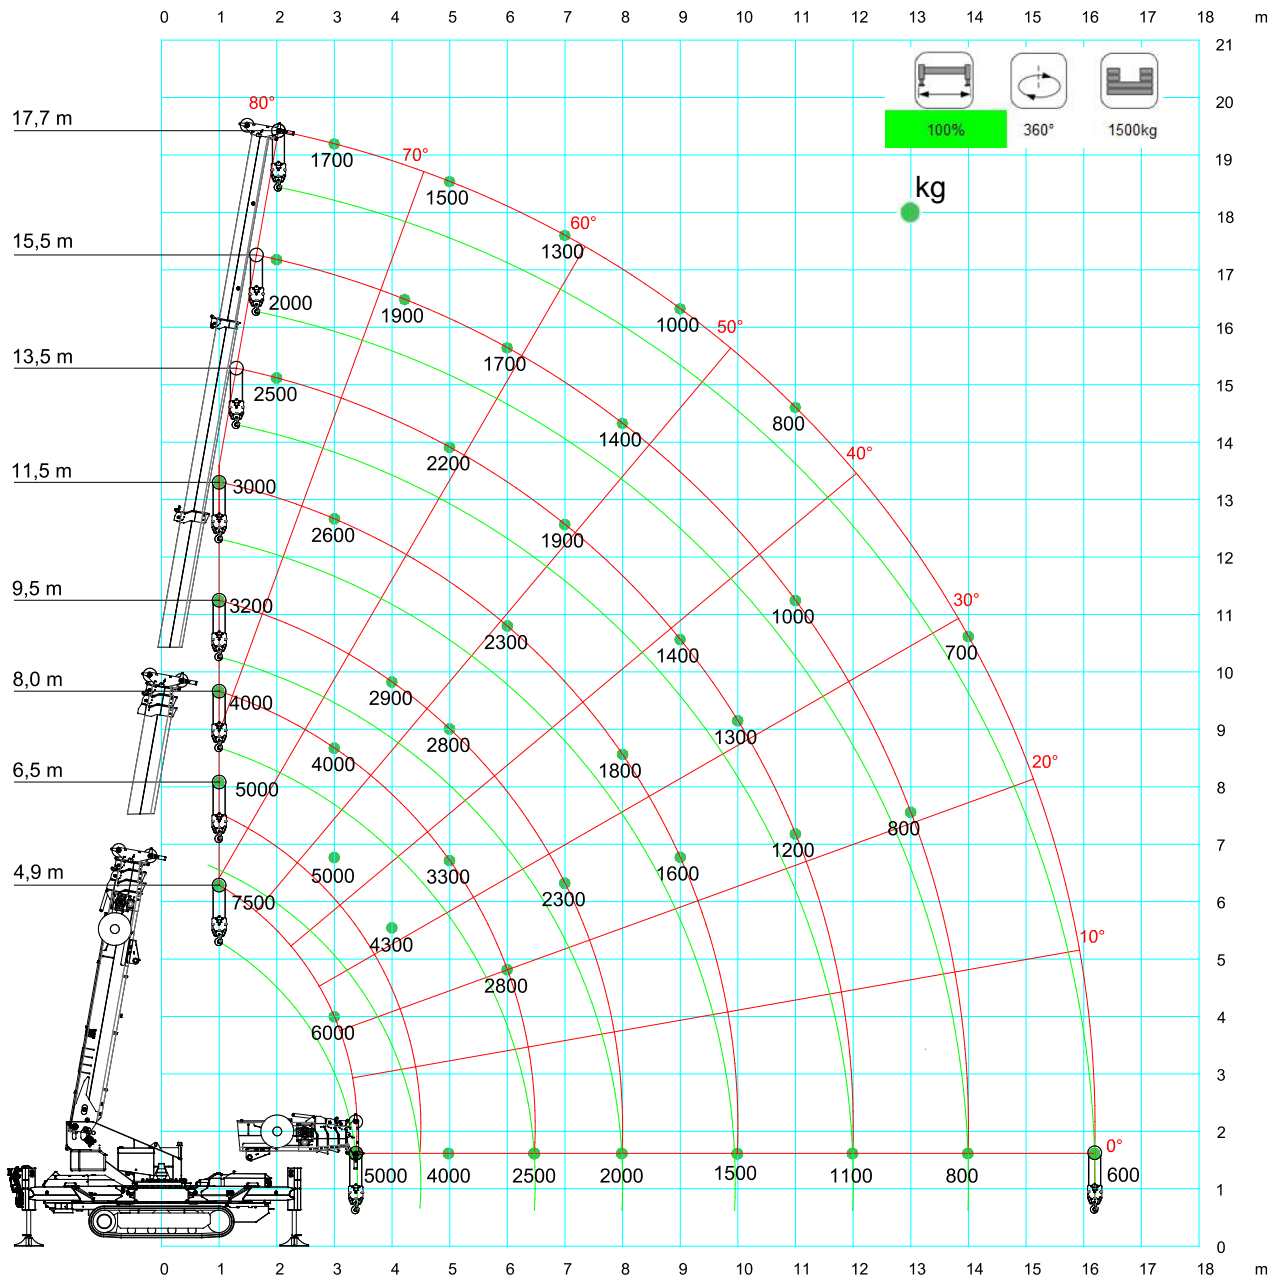






SPX1275CDH-2

SPX1275CDH-2 – MAIN BOOM








[m] [ton]																	
	MAIN BOOM	100%	360°	1500kg	4,9	5,5	6,5	8,0	8,1	8,5	9,5	10,5	11,5	13,5	14,5	16,5	17,7
1,0	7,5	6,5	5,0	4,0	3,7	3,5	3,2										
2,0	7,5	6,5	5,0	4,0	3,7	3,4	3,2	3,0	2,8	2,5	2,3						
3,0	6,0	5,6	5,0	4,0	3,6	3,3	3,0	2,8	2,6	2,4	2,3	1,8	1,7				
3,4	5,0	4,9	4,6	4,0	3,5	3,3	3,0	2,8	2,6	2,4	2,3	1,8	1,7				
4,0		4,8	4,3	4,0	3,4	3,2	2,9	2,7	2,6	2,3	2,3	1,8	1,7				
5,0			4,0	3,3	3,1	3,1	2,8	2,6	2,5	2,2	2,1	1,7	1,5				
6,0				2,8	2,7	2,7	2,6	2,4	2,3	2,0	1,8	1,6	1,4				
6,5				2,5	2,5	2,5	2,4	2,2	2,1	1,9	1,7	1,5	1,3				
6,6					2,5	2,5	2,4	2,2	2,1	1,9	1,7	1,5	1,3				
7,0						2,4	2,3	2,2	2,1	1,9	1,7	1,4	1,3				
8,0							2,0	1,9	1,8	1,6	1,5	1,3	1,2				
9,0								1,7	1,6	1,4	1,3	1,1	1,0				
10,0									1,5	1,3	1,2	1,0	0,9				
11,0										1,15	1,1	0,8	0,8				
12,0										1,05	1,0	0,8	0,7				
13,0											0,9	0,7	0,7				
14,0												0,7	0,7				
15,0													0,7	0,6			
16,2																	0,6






LC1275_V105_0816_MB_CW_1500_STAB_100

[m] [ton]																	
	MAIN BOOM	50%	360°	1500kg	4,9	5,5	6,5	8,0	8,1	8,5	9,5	10,5	11,5	13,5	14,5	16,5	17,7
1,0	7,5	6,5	5,0	4,0	3,7	3,5	3,2										
2,0	7,0	56,5	5,0	4,0	3,7	3,4	3,2	3,0	2,8	2,5	2,3						
3,0	4,2	4,0	3,6	3,0	2,8	2,7	2,6	2,5	2,4	2,2	2,0	1,5	1,4				
3,4	3,7	3,6	3,2	2,7	2,5	2,3	2,1	2,0	1,9	1,8	1,7	1,3	1,2				
4,0		3,2	2,8	2,6	2,4	2,2	2,0	1,8	1,7	1,6	1,5	1,2	1,1				
5,0			2,5	2,0	1,8	1,8	1,8	1,7	1,6	1,5	1,4	1,0	0,9				
6,0				1,8	1,7	1,7	1,7	1,6	1,4	1,3	1,2	1,0	0,9				
6,5				1,7	1,6	1,6	1,6	1,5	1,4	1,2	1,1	0,9	0,8				
6,6					1,6	1,6	1,6	1,5	1,4	1,2	1,1	0,9	0,8				
7,0						1,5	1,5	1,4	1,4	1,2	1,1	0,9	0,8				
8,0							1,2	1,2	1,2	1,1	1,0	0,8	0,8				
9,0								1,0	1,0	0,9	0,9	0,7	0,6				
10,0									0,8	0,8	0,7	0,6	0,5				
11,0										0,7	0,7	0,4	0,4				
12,0										0,6	0,6	0,4	0,4				
13,0											0,5	0,4	0,4				
14,0											0,4	0,35	0,3				
15,0												0,35	0,3				
16,2													0,3				

LC1275_V105_0816_MB_CW_1500_STAB_50

[m] [ton]																	
	MAIN BOOM	100%	360°	0kg	4,9	5,5	6,5	8,0	8,1	8,5	9,5	10,5	11,5	13,5	14,5	16,5	17,7
1,0	7,5	6,0	5,0	4,0	3,7	3,5	3,2										
2,0	7,5	6,0	5,0	4,0	3,7	3,4	3,2	3,0	2,8	2,5	2,3						
3,0	4,8	4,5	3,8	3,8	3,5	3,2	2,9	2,7	2,5	2,3	2,2	1,7	1,6				
3,4	4,0	3,9	3,8	3,7	3,3	3,0	2,8	2,6	2,4	2,2	2,1	1,6	1,5				
4,0		3,8	3,4	3,0	2,8	2,6	2,5	2,4	2,3	2,2	2,1	1,6	1,5				
5,0			3,0	2,9	2,5	2,5	2,3	2,2	2,2	2,2	2,0	1,5	1,3				
6,0				2,2	2,2	2,2	2,2	2,1	2,0	1,8	1,6	1,4	1,2				
6,5				2,1	2,0	2,0	1,9	1,7	1,7	1,5	1,3	1,1	0,9				
6,6					2,0	2,0	1,9	1,7	1,7	1,5	1,3	1,0	0,9				
7,0						1,7	1,7	1,6	1,5	1,4	1,2	0,9	0,8				
8,0							1,3	1,3	1,2	1,1	1,0	0,8	0,8				
9,0								1,1	1,0	0,9	0,9	0,8	0,7				
10,0									0,9	0,8	0,8	0,7	0,6				
11,0										0,7	0,6	0,5	0,5				
12,0										0,6	0,6	0,5	0,4				
13,0											0,5	0,4	0,4				
14,0												0,4	0,3				
15,0													0,4	0,3			
16,2																	0,3

LC1275_V105_0816_MB_CW_0_STAB_100


[m] [ton]	 MAIN BOOM	 50%	 360°	 0kg	 EN								
	4,9	5,5	6,5	7,5	8	8,1	8,5	9,5	10,5	11,5	12,5	13,5	
1,0	7,5	6,0	5,0	4,3	4,0	3,7	3,5	3,2					
2,0	7,5	6,0	5,0	4,3	4,0	3,7	3,4	3,2	3,0	2,6	2,4	2,4	
3,0	3,8	3,6	3,2	3,0	2,8	2,6	2,4	2,2	2,0	1,8	1,7	1,7	
3,4	3,0	3,0	2,9	2,6	2,5	2,4	2,2	2,0	1,8	1,6	1,4	1,4	
4,0		2,4	2,3	2,2	2,2	2,0	1,8	1,6	1,4	1,3	1,2	1,2	
5,0			1,7	1,6	1,6	1,5	1,5	1,5	1,4	1,3	1,2	1,2	
6,0				1,2	1,2	1,2	1,1	1,1	1,1	1,0	1,0	1,0	
6,5					1,1	1,1	1,0	1,0	1,0	1,0	1,0	0,9	
6,6						1,0	1,0	1,0	0,9	0,9	0,9	0,8	
7,0							0,9	0,9	0,8	0,8	0,7	0,7	
8,0								0,7	0,7	0,6	0,6	0,5	
9,0									0,6	0,5	0,5	0,5	
10,0										0,5	0,5	0,4	
11,0											0,4	0,4	
12,0												0,3	

LC1275_V105_0816_MB_CW_0_STAB_50



SPX1275CDH-2

SPX1275CDH-2 – MAIN BOOM PICK & CARRY

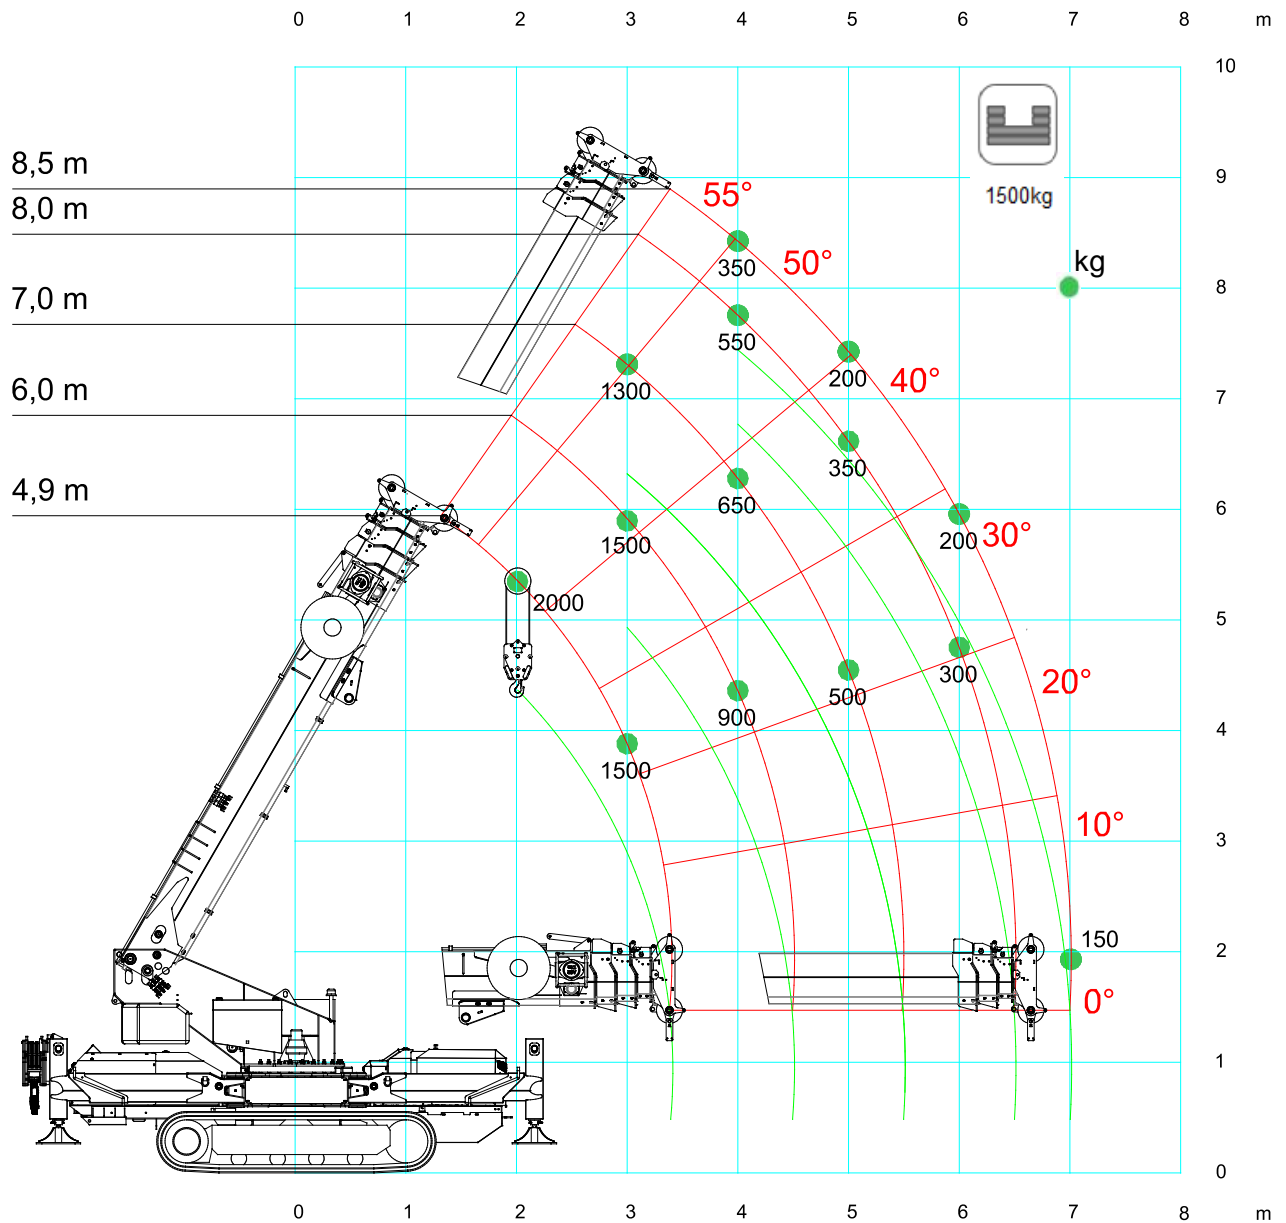

[m] [ton]						EN
	MAIN BOOM	2050	>0km/h	360°	1500kg	
	4,9	5,5	6,5	7,5	8,5	
2,0	2,0	2,0	2,0	1,0	0,50	
3,0	1,5	1,5	1,3	0,75	0,45	
4,0		0,9	0,65	0,55	0,35	
5,0			0,5	0,35	0,2	
6,0				0,3	0,2	
7,1					0,15	


LC1275_V105_0816_MB_CW_1500_CINGOLI

[m] [ton]						EN
	MAIN BOOM	1450	>0km/h	0°	1500kg	
	4,9	5,5	6,5	7,5	8,5	
2,0	2,0	2,0	2,0	1,0	0,50	
3,0	1,5	1,5	1,3	0,75	0,45	
4,0		0,9	0,65	0,55	0,35	
5,0			0,5	0,35	0,2	
6,0				0,3	0,2	
7,1					0,15	







LC1275_V105_0816_MB_CW_1500_CINGOLI

SPX1275CDH-2 + JIB3500G

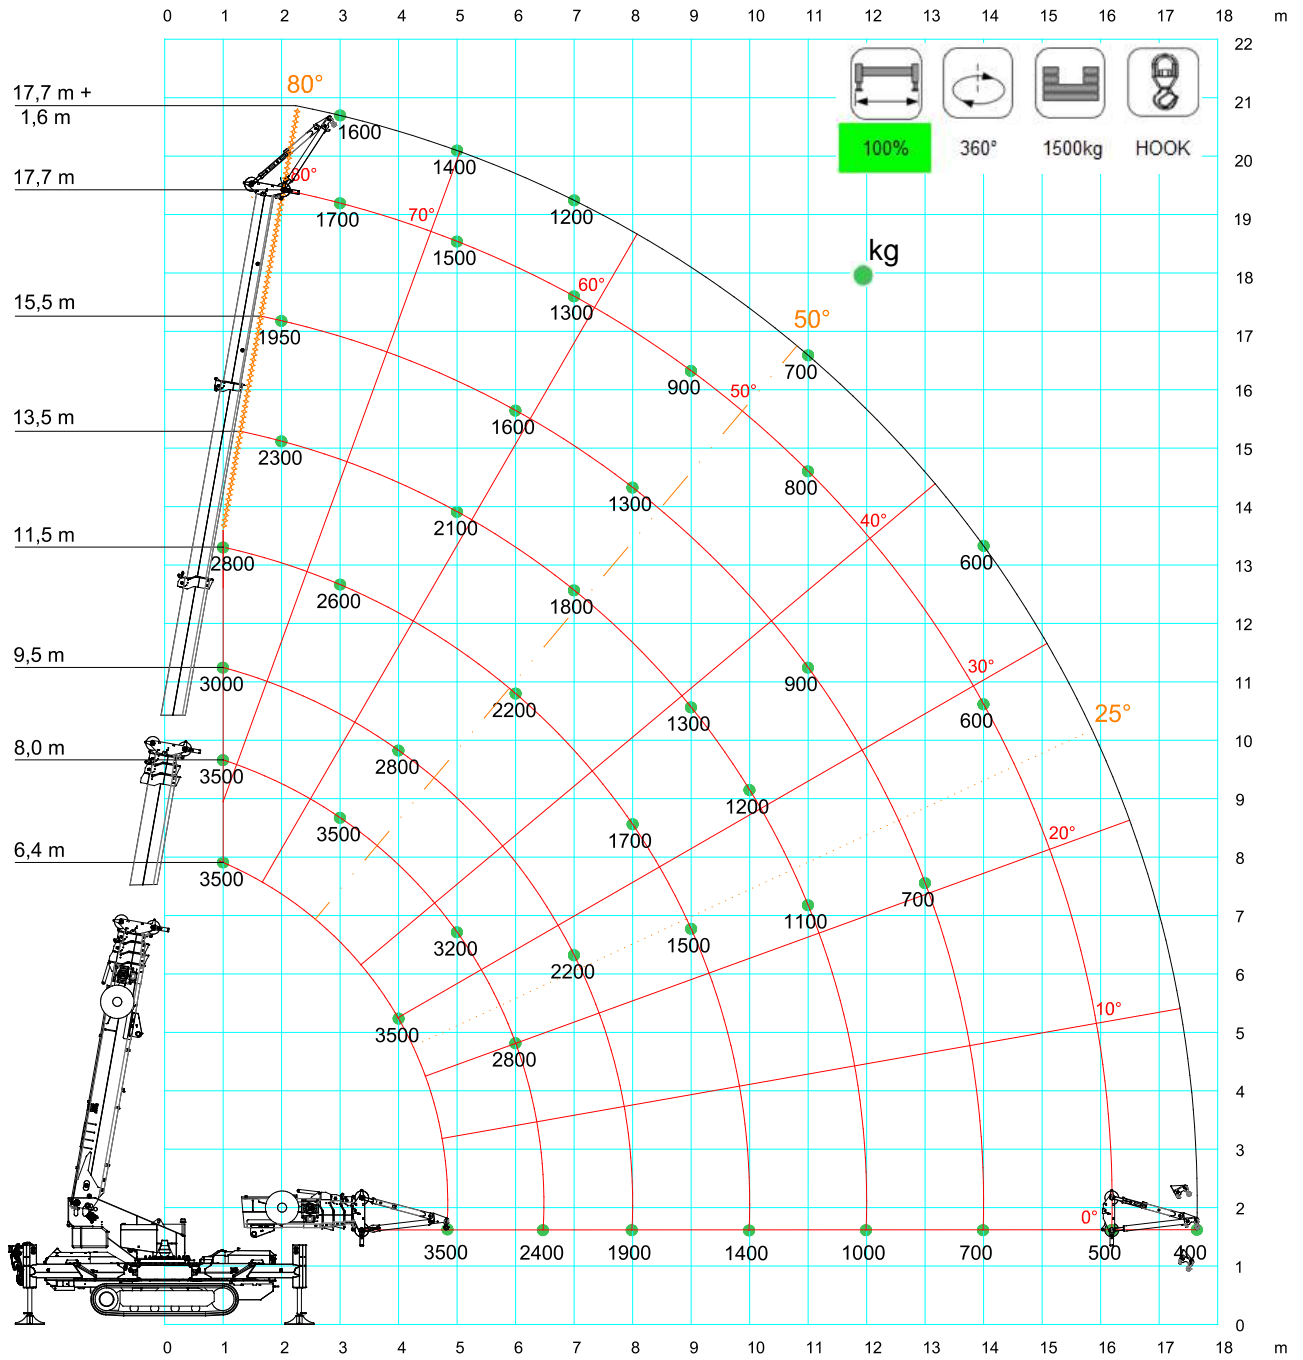





HOOK CONFIGURATION









- 25°: max angle with jib in -33° hook configuration.
- . - . 50°: max angle with jib in -7° hook configuration.
- ***** 80°: max angle with jib in 22° hook configuration.

[m] \ [ton]	 JIB3500G	 100%	 360°	 1500kg	 HOOK	 EN		
	6,4	8,0	9,5	11,5	13,5	15,5	17,7	19,3
1,0	3,5	3,5	3,0	2,8				
2,0	3,5	2,5	2,9	2,6	2,3	1,95	1,8	1,6
3,0	3,5	3,5	2,9	2,6	2,2	1,9	1,7	1,6
4,0	3,5	3,4	2,8	2,5	2,15	1,8	1,6	1,5
5,0		3,2	2,6	2,35	2,1	1,7	1,5	1,4
6,0		2,8	2,4	2,2	2,0	1,6	1,4	1,3
7,0			2,2	2,1	1,8	1,45	1,3	1,2
8,0			1,9	1,7	1,5	1,3	1,1	1,0
9,0				1,5	1,3	1,1	0,9	0,8
10,0				1,4	1,2	1,0	0,8	0,75
11,0					1,1	0,9	0,8	0,7
12,0					1,0	0,8	0,7	0,65
13,0						0,7	0,65	0,65
14,0						0,7	0,6	0,6
15,0							0,6	0,55
16,0							0,5	0,45
17,0								0,43
17,7								0,4







LC1275_V105_0816_RUNNER_7deg_CW1500_G_STAB_100

[m] \ [ton]	 JIB3500G	 50%	 360°	 1500kg	 HOOK	 EN		
	6,4	8,0	9,5	11,5	13,5	15,5	17,7	19,3
1,0	3,5	3,5	3,0	2,8				
2,0	3,2	3,2	2,9	2,6	2,3	1,20	1,1	1,0
3,0	1,8	1,6	1,5	1,4	1,2	1,1	0,95	0,9
4,0	1,7	1,6	1,4	1,25	1,00	0,9	0,85	0,8
5,0		1,6	1,3	1,2	0,95	0,85	0,8	0,75
6,0		1,5	1,3	1,1	0,9	0,8	0,75	0,7
7,0			1,2	1,0	0,85	0,75	0,7	0,65
8,0			1,0	0,8	0,75	0,6	0,55	0,5
9,0				0,7	0,6	0,52	0,46	0,4
10,0				0,6	0,58	0,5	0,44	0,38
11,0					0,56	0,45	0,42	0,36
12,0					0,55	0,45	0,4	0,35
13,0						0,4	0,35	0,33
14,0						0,33	0,32	0,3
15,0							0,3	0,23
16,0							0,25	0,22
17,0								0,21
17,7								0,2

LC1275_V105_0816_RUNNER_7deg_CW1500_G_STAB_50

[m] \ [ton]	 JIB3500G	 100%	 360°	 0kg	 HOOK	 EN		
	6,4	8,0	9,5	11,5	13,5	15,5	17,7	19,3
1,0	3,5	3,5	3,0	2,8				
2,0	3,5	3,5	2,9	2,5	2,0	1,5	1,4	1,3
3,0	3,2	3,0	2,8	2,3	1,8	1,4	1,3	1,2
4,0	2,5	2,3	2,0	1,8	1,6	1,35	1,2	1,1
5,0		2,2	1,8	1,60	1,4	1,3	1,1	1,0
6,0		2,0	1,6	1,4	1,2	1,1	1,0	0,9
7,0			1,5	1,3	1,1	1,00	0,9	0,8
8,0			1,3	1,1	1,0	0,9	0,8	0,7
9,0				1,0	0,9	0,8	0,7	0,6
10,0				0,9	0,8	0,7	0,6	0,55
11,0					0,7	0,65	0,6	0,5
12,0					0,6	0,55	0,5	0,45
13,0						0,5	0,45	0,4
14,0						0,5	0,4	0,35
15,0							0,35	0,3
16,0							0,26	0,24
17,0								0,22
17,7								0,2

LC1275_V105_0816_RUNNER_7deg_CW0_G_STAB_100

[m] \ [ton]	 JIB3500G	 50%	 360°	 0kg	 HOOK	 EN
	6,4	8,0	9,5	11,5	13,5	
1,0	3,5	3,5	3,0	2,8		
2,0	3,2	3,2	2,9	2,4	1,8	
3,0	1,8	1,7	1,6	1,5	1,4	
4,0	1,7	1,6	1,4	1,2	1,1	
5,0		1,4	1,3	1,2	1,0	
6,0		1,1	1,0	0,9	0,8	
7,0			0,8	0,7	0,6	
8,0			0,7	0,6	0,5	
9,0				0,5	0,4	
10,0				0,35	0,3	
11,0					0,25	
12,0					0,2	


LC1275_V105_0816_RUNNER_7deg_CW0_G_STAB_50




SPX1275CDH-2

SPX1275CDH-2 + JIB3500G

PULLEY CONFIGURATION

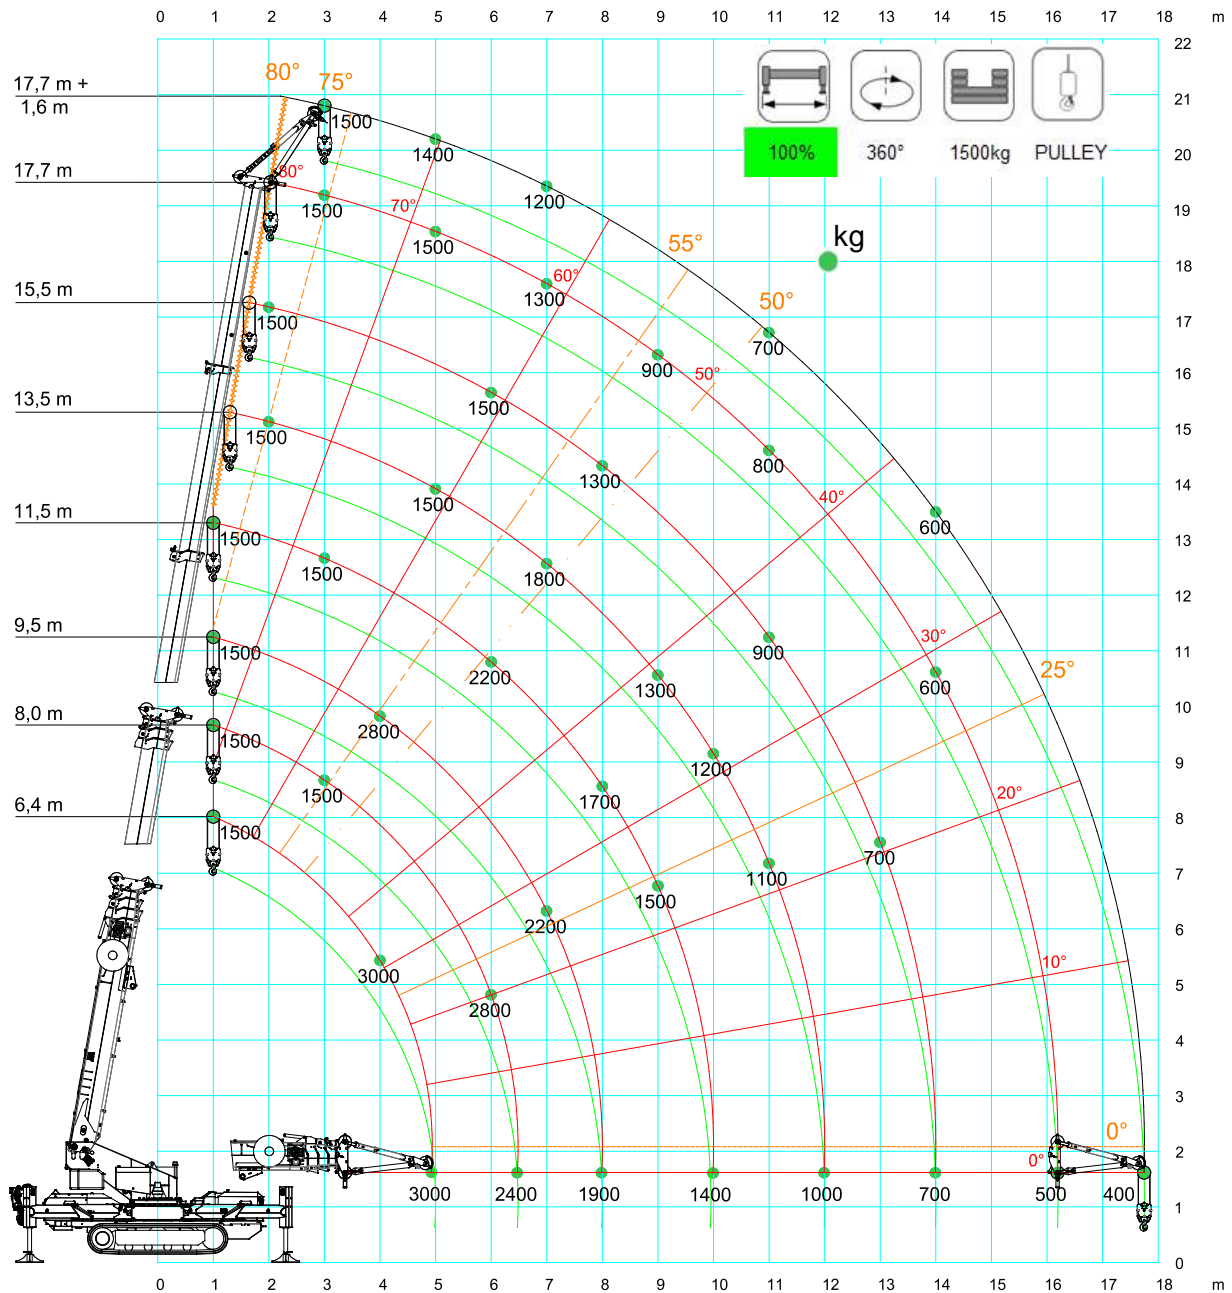


- 0°: max angle with jib in -33° double fall configuration, maximum 3000 kg.
- 25°: max angle with jib in -7° double fall configuration, maximum 3000 kg.
- . - . 50°: max angle with jib in -33° single fall configuration, maximum 1500 kg.
- - - - 55°: max angle with jib in 22° double fall configuration, maximum 3000 kg.
- - - - 75°: max angle with jib in -7° single fall configuration, maximum 1500 kg.
- ***** 80°: max angle with jib in 22° single fall configuration, maximum 1500 kg.

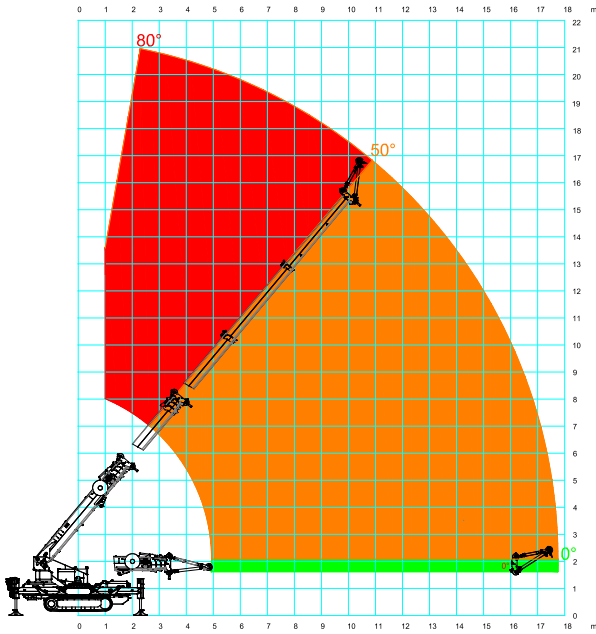


-33°






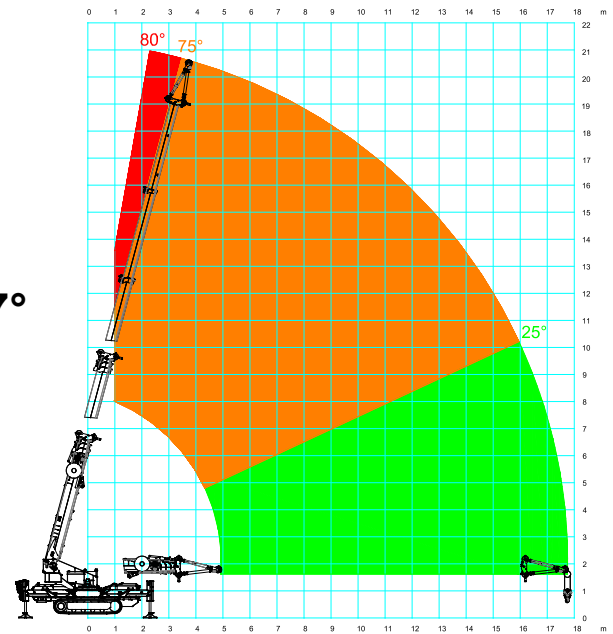
Movement capabilities:
■ : up to double fall area;
■ : single fall area;
■ : restricted area

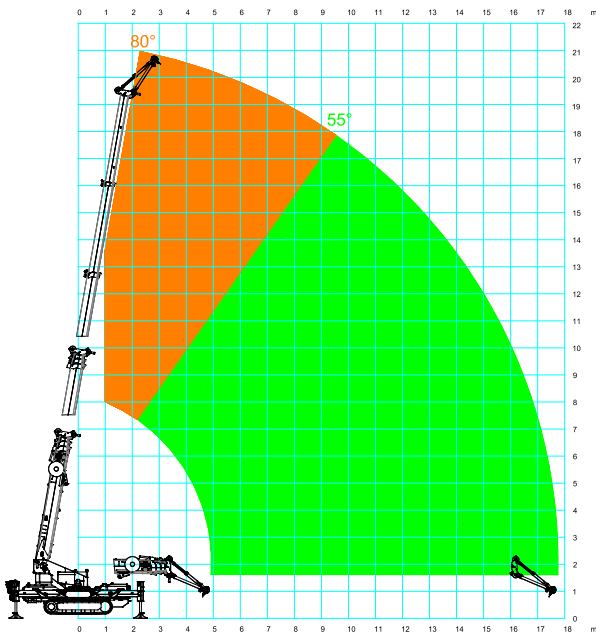







-7°









22°

[m] \ [ton]	 JIB3500G	 100%	 360°	 1500kg	 PULLEY	 EN		
	6,4	8,0	9,5	11,5	13,5	15,5	17,7	19,3
1,0	1,5	1,5	1,5	1,5				
2,0	1,5	1,5	1,5	1,5	1,5	1,5		
3,0	3,0	1,5	1,5	1,5	1,5	1,5	1,5	1,5
4,0	3,0	3,0	2,8	1,5	1,5	1,5	1,5	1,5
5,0		3,0	2,6	1,5	1,5	1,5	1,5	1,4
6,0		2,8	2,4	2,2	1,5	1,5	1,4	1,3
7,0			2,2	2,1	1,8	1,45	1,3	1,2
8,0			1,9	1,7	1,5	1,3	1,1	1,0
9,0				1,5	1,3	1,1	0,9	0,8
10,0				1,4	1,2	1,0	0,8	0,75
11,0					1,1	0,9	0,8	0,7
12,0					1,0	0,8	0,7	0,65
13,0						0,7	0,65	0,65
14,0						0,7	0,6	0,6
15,0							0,6	0,55
16,0							0,5	0,45
17,0								0,43
17,7								0,4







LC1275_V105_0816_RUNNER_7deg_CW1500_STAB_100

[m] \ [ton]	 JIB3500G	 50%	 360°	 1500kg	 PULLEY	 EN		
	6,4	8,0	9,5	11,5	13,5	15,5	17,7	19,3
1,0	1,5	1,5	1,5	1,5				
2,0	1,5	1,5	1,5	1,5	1,5	1,2	1,1	1,0
3,0	1,8	1,5	1,5	1,4	12,0	1,1	0,95	0,9
4,0	1,7	1,6	1,4	1,25	1,0	0,9	0,85	0,8
5,0		1,6	1,3	1,2	0,95	0,85	0,8	0,75
6,0		1,5	1,3	1,1	0,9	0,8	0,75	0,7
7,0			1,2	1,0	0,85	0,75	0,7	0,65
8,0			1,0	0,8	0,75	0,6	0,55	0,5
9,0				0,7	0,6	0,52	0,46	0,4
10,0				0,6	0,58	0,5	0,44	0,38
11,0					0,56	0,45	0,42	0,36
12,0					0,55	0,45	0,4	0,35
13,0						0,4	0,35	0,33
14,0						0,33	0,32	0,3
15,0							0,3	0,23
16,0							0,25	0,22
17,0								0,21
17,7								0,20

LC1275_V105_0816_RUNNER_7deg_CW1500_STAB_50


[m] \ [ton]	 JIB3500G	 100%	 360°	 0kg	 PULLEY	 EN		
	6,4	8,0	9,5	11,5	13,5	15,5	17,7	19,3
1,0	1,5	1,5	1,5	1,5				
2,0	1,5	1,5	1,5	1,5	1,5	1,5	1,4	1,3
3,0	3,0	1,5	1,5	1,5	1,5	1,4	1,3	1,2
4,0	2,5	2,3	2,0	1,5	1,5	1,35	1,2	1,1
5,0		2,2	1,8	1,5	1,4	1,3	1,1	1,0
6,0		2,0	1,6	1,4	1,2	1,1	1,0	0,9
7,0			1,5	1,3	1,1	1,00	0,9	0,8
8,0			1,3	1,1	1,0	0,9	0,8	0,7
9,0				1,0	0,9	0,8	0,7	0,6
10,0				0,9	0,8	0,7	0,6	0,55
11,0					0,7	0,65	0,6	0,5
12,0					0,6	0,55	0,5	0,45
13,0						0,5	0,45	0,40
14,0						0,5	0,4	0,35
15,0							0,35	0,3
16,0							0,26	0,24
17,0								0,22
17,7								0,2






LC1275_V105_0816_RUNNER_7deg_CW1500_STAB_100

[m]						
[ton]	JIB3500G	50%	360°	0kg	HOOK	
	6,4	8,0	9,5	11,5	13,5	
1,0	1,5	1,5	1,5	1,5		
2,0	1,5	1,5	1,5	1,5	1,5	
3,0	1,8	1,5	1,5	1,5	1,4	
4,0	1,7	1,6	1,4	1,20	1,1	
5,0		1,4	1,3	1,2	1,00	
6,0		1,1	1,0	0,9	0,8	
7,0			0,8	0,7	0,60	
8,0			0,7	0,6	0,50	
9,0				0,5	0,4	
10,0				0,4	0,30	
11,0					0,25	
12,0					0,20	






LC1275_V105_0816_RUNNER_7deg_CW0_STAB_50

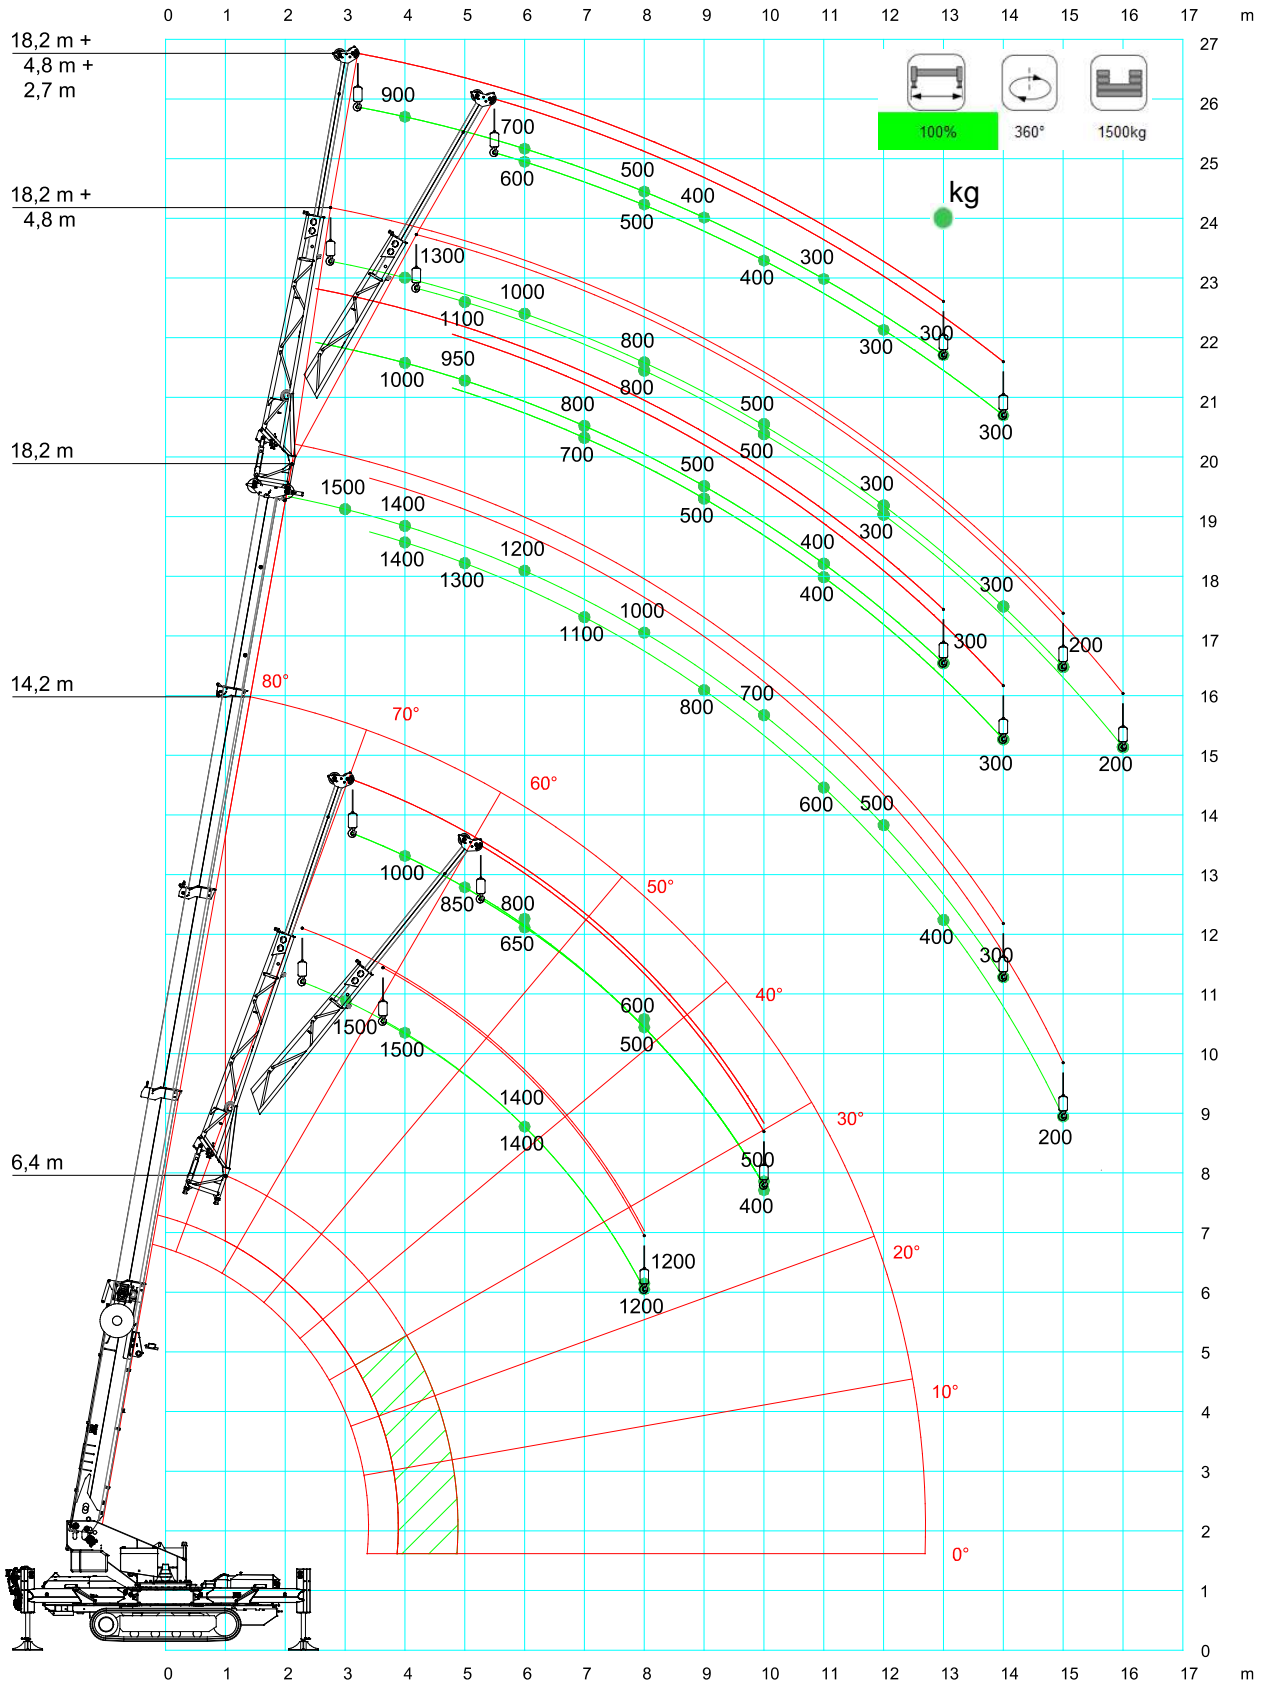SPX1275CDH-2 + JIB1500.1FL



[m] [ton]	    					
	JIB1500.1F L		100%	360°	1500kg	EN
	6,4 + 4,8		14,2 + 4,8		18,2 + 4,8	
	0°	25°	0°	25°	0°	25°
3,0	1,5		1,5			
4,0	1,5	1,5	1,4	1,4	1,3	
5,0	1,5	1,5	1,3	1,3	1,1	1,1
6,0	1,4	1,4	1,2	1,2	1,0	1,0
7,0	1,3	1,3	1,1	1,1	0,9	0,9
8,0	1,2	1,2	1,0	1,0	0,8	0,8
9,0			0,8	0,8	0,6	0,6
10,0			0,7	0,7	0,5	0,5
11,0			0,6	0,6	0,4	0,4
12,0			0,5	0,5	0,3	0,3
13,0			0,4	0,4	0,3	0,3
14,0			0,3	0,3	0,3	0,3
15,0				0,2	0,2	0,2
16,0						0,2

LC1275_V105_0816_JIB_0deg_STAB_100
 LC1275_V105_0816_JIB_25deg_STAB_100

[m] [ton]	 JIB 1500.1F L+ STINGER		 100%		 360°		 1500kg		 EN	
	6,4 + 4,8		14,2 + 4,8		18,2 + 4,8					
	0°	25°	0°	25°	0°	25°				
4,0	1,0		1,0							
5,0	0,85		0,95		0,8					
6,0	0,8	0,65	0,9	0,8	0,7	0,6				
7,0	0,65	0,55	0,8	0,7	0,6	0,6				
8,0	0,6	0,5	0,6	0,6	0,5	0,5				
9,0	0,55	0,45	0,5	0,5	0,4	0,4				
10,0	0,5	0,4	0,5	0,5	0,4	0,4				
11,0			0,4	0,4	0,3	0,3				
12,0			0,3	0,3	0,3	0,3				
13,0			0,3	0,3	0,3	0,3				
14,0				0,3		0,3				


LC1275_V105_0816_STINGER_0deg_STAB_100
 LC1275_V105_0816_STINGER_25deg_STAB_100




SPX1275CDH-2






SPX1275CDH-2 + JIB1500.3HL

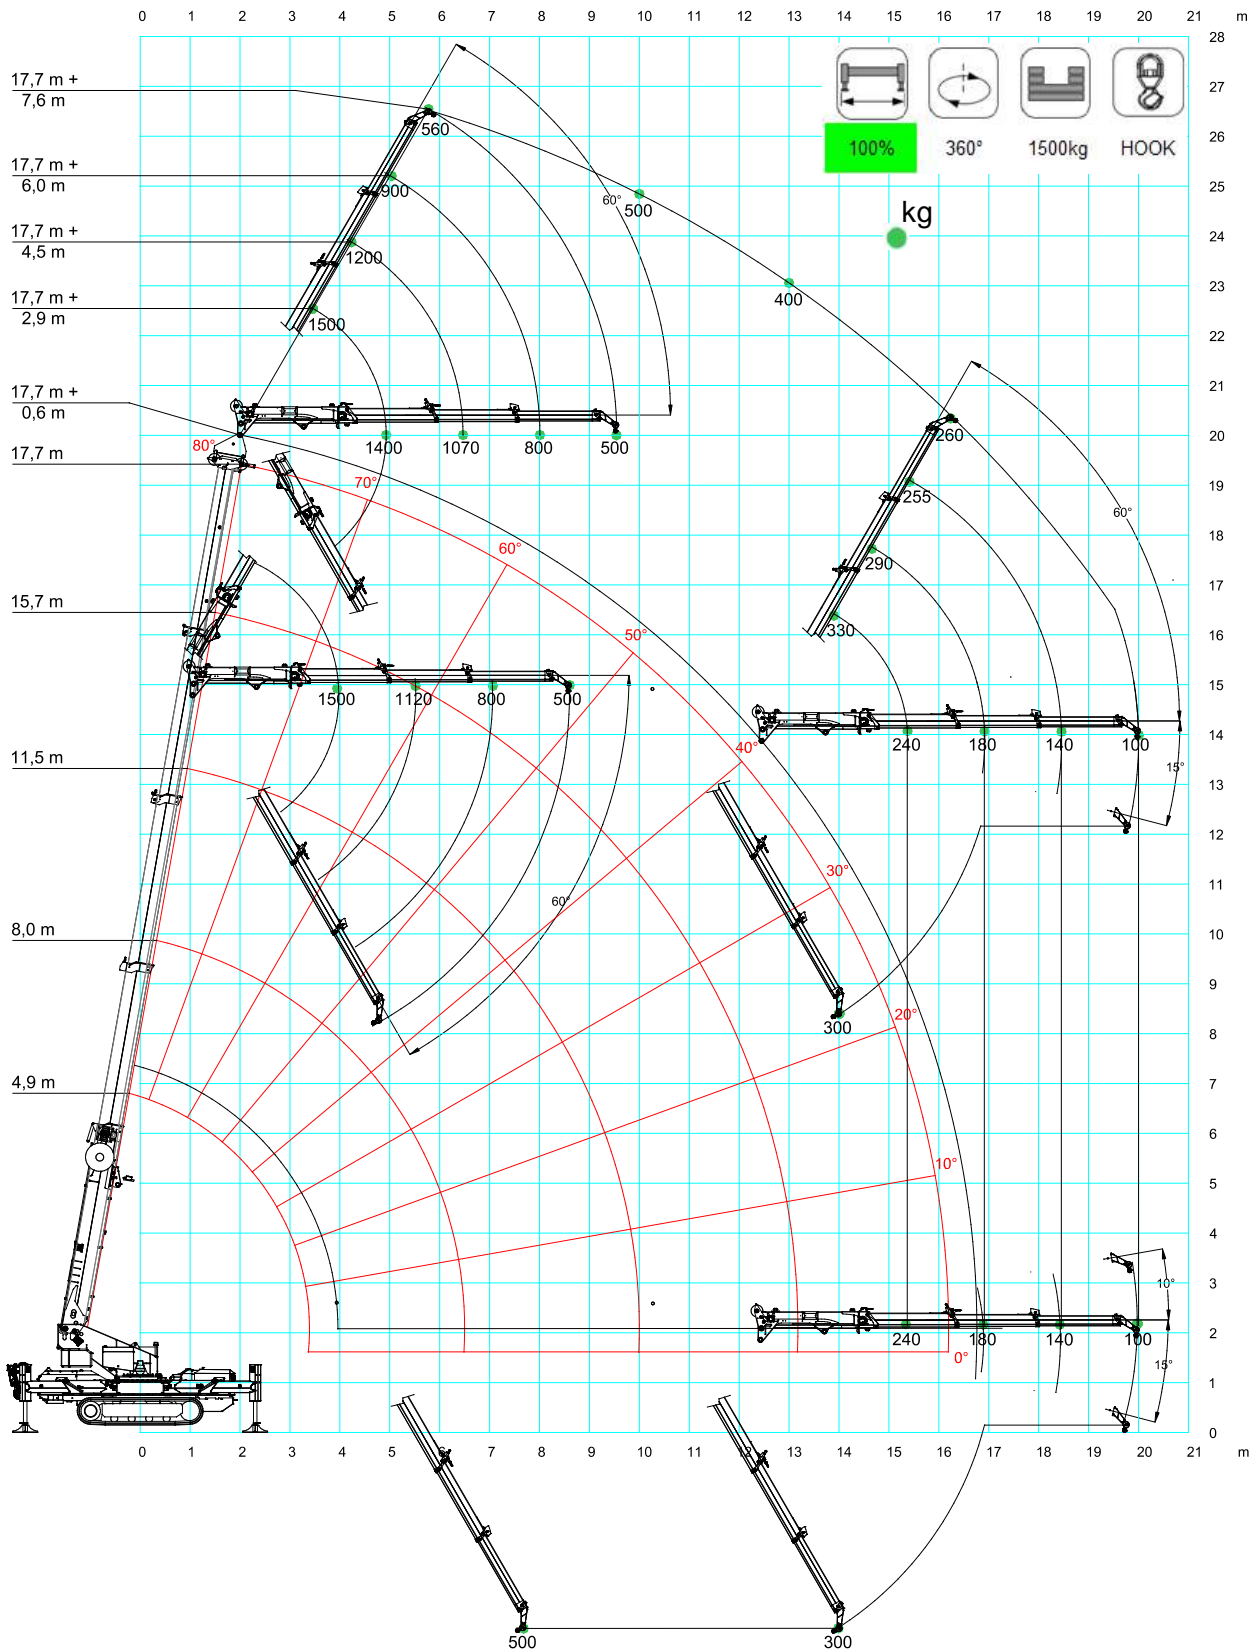HOOK CONFIGURATION







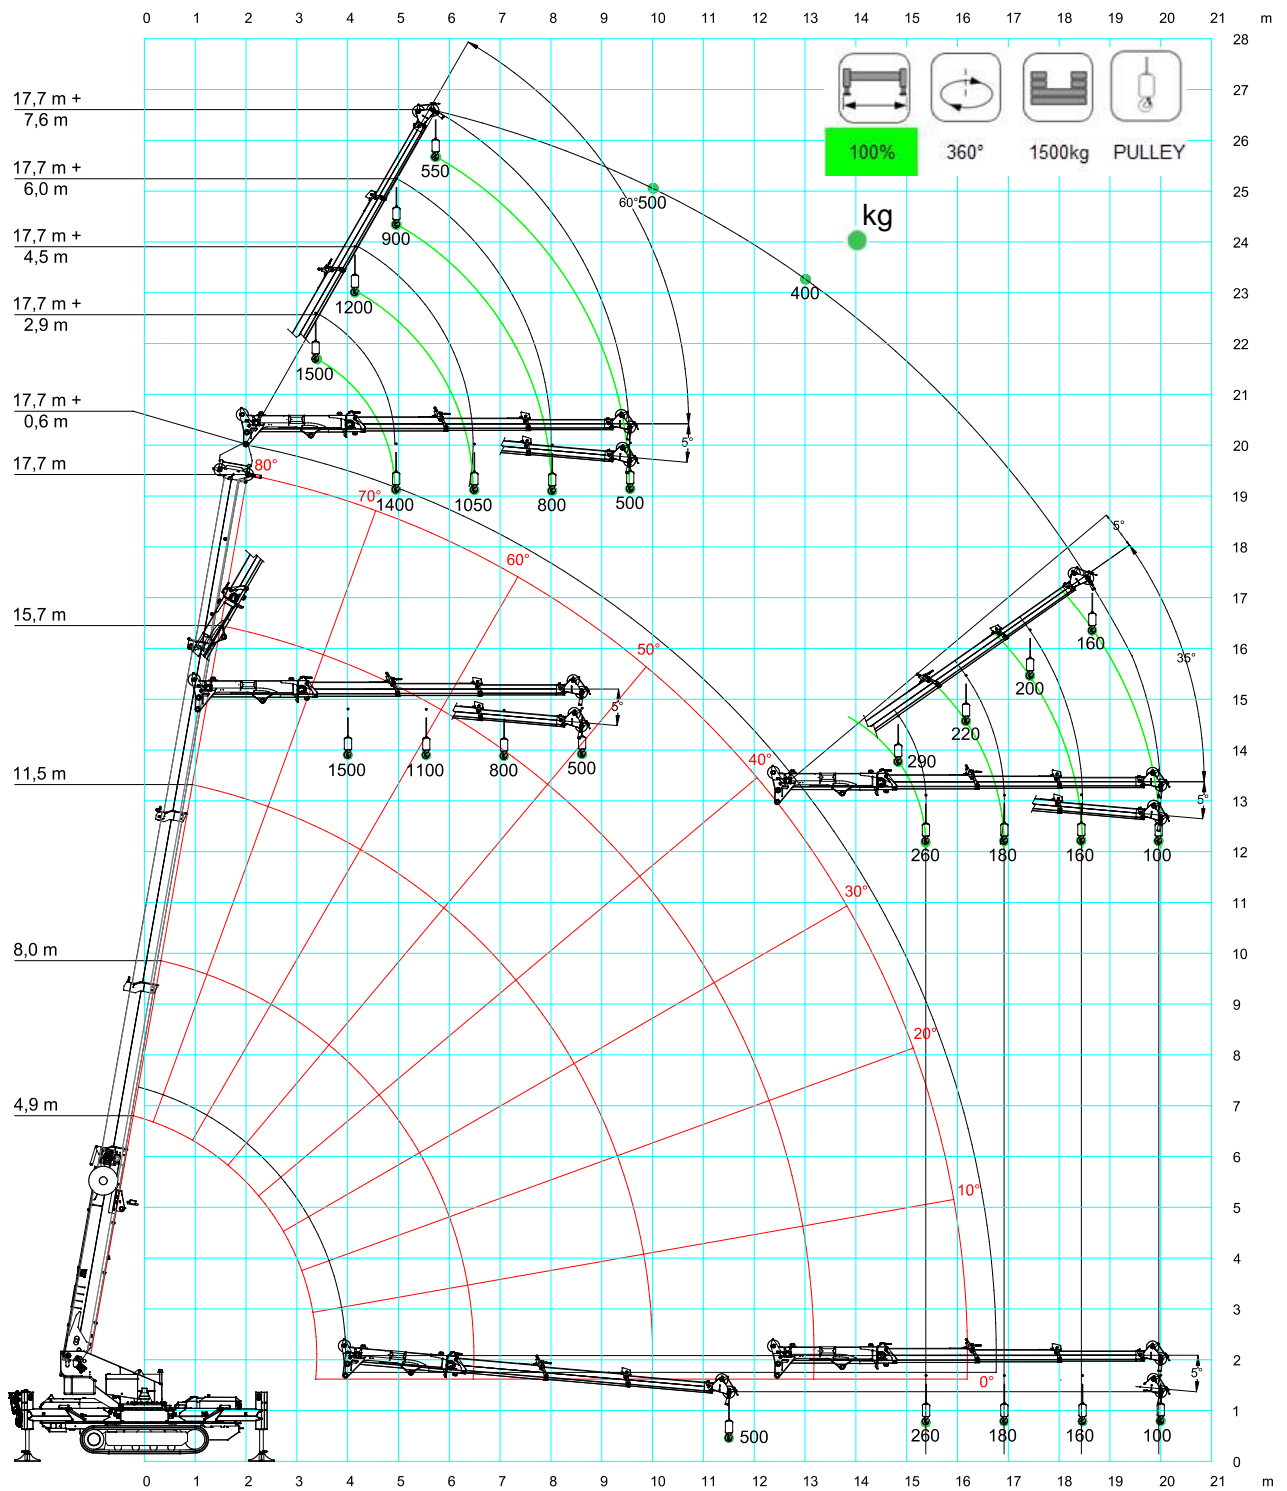
PULLEY CONFIGURATION




[m] [ton]					
	JIB1500.3HL	100%	360°	1500kg	
	2,93	4,47	6,01	7,55	
2,0	1,5				
3,0	1,5	1,2	0,95	0,65	
4,0	1,5	1,2	0,95	0,65	
5,0	1,4	1,2	0,9	0,6	
6,0	1,3	1,1	0,9	0,6	
7,0	1,2	1,1	0,8	0,5	
8,0	1,1	1,0	0,8	0,5	
9,0	1,0	0,9	0,8	0,5	
10,0	0,9	0,8	0,7	0,5	
11,0	0,8	0,7	0,60	0,50	
12,0	0,6	0,6	0,55	0,50	
13,0	0,5	0,4	0,4	0,4	
14,0	0,3	0,3	0,3	0,3	
15,0	0,3	0,3	0,3	0,3	
16,0	0,2	0,2	0,2	0,3	
17,0	0,1	0,2	0,2	0,2	
18,0		0,1	0,2	0,2	
19,0			0,1	0,1	
20,0				0,1	

LC1275_V105_0816_JIB1500_3H_CW_1500_STAB_100

[m]					
[ton]	JIB1500.3HL	50%	360°	1500kg	
	2,93	4,47	6,01	7,55	
2,0	1,5				
3,0	1,50	1,0	0,80	0,5	
4,0	1,4	1,00	0,8	0,5	
5,0	1,30	1,00	0,8	0,5	
6,0	1,0	1,0	0,8	0,5	
7,0	0,8	0,7	0,6	0,5	
8,0	0,6	0,55	0,5	0,45	
9,0	0,4	0,4	0,4	0,4	
10,0	0,25	0,25	0,25	0,3	
11,0	0,12	0,12	0,12	0,12	

LC1275_V105_0816_JIB1500_3H_CW_1500_STAB_50


SPX1275CDH-2 + JIB300GR

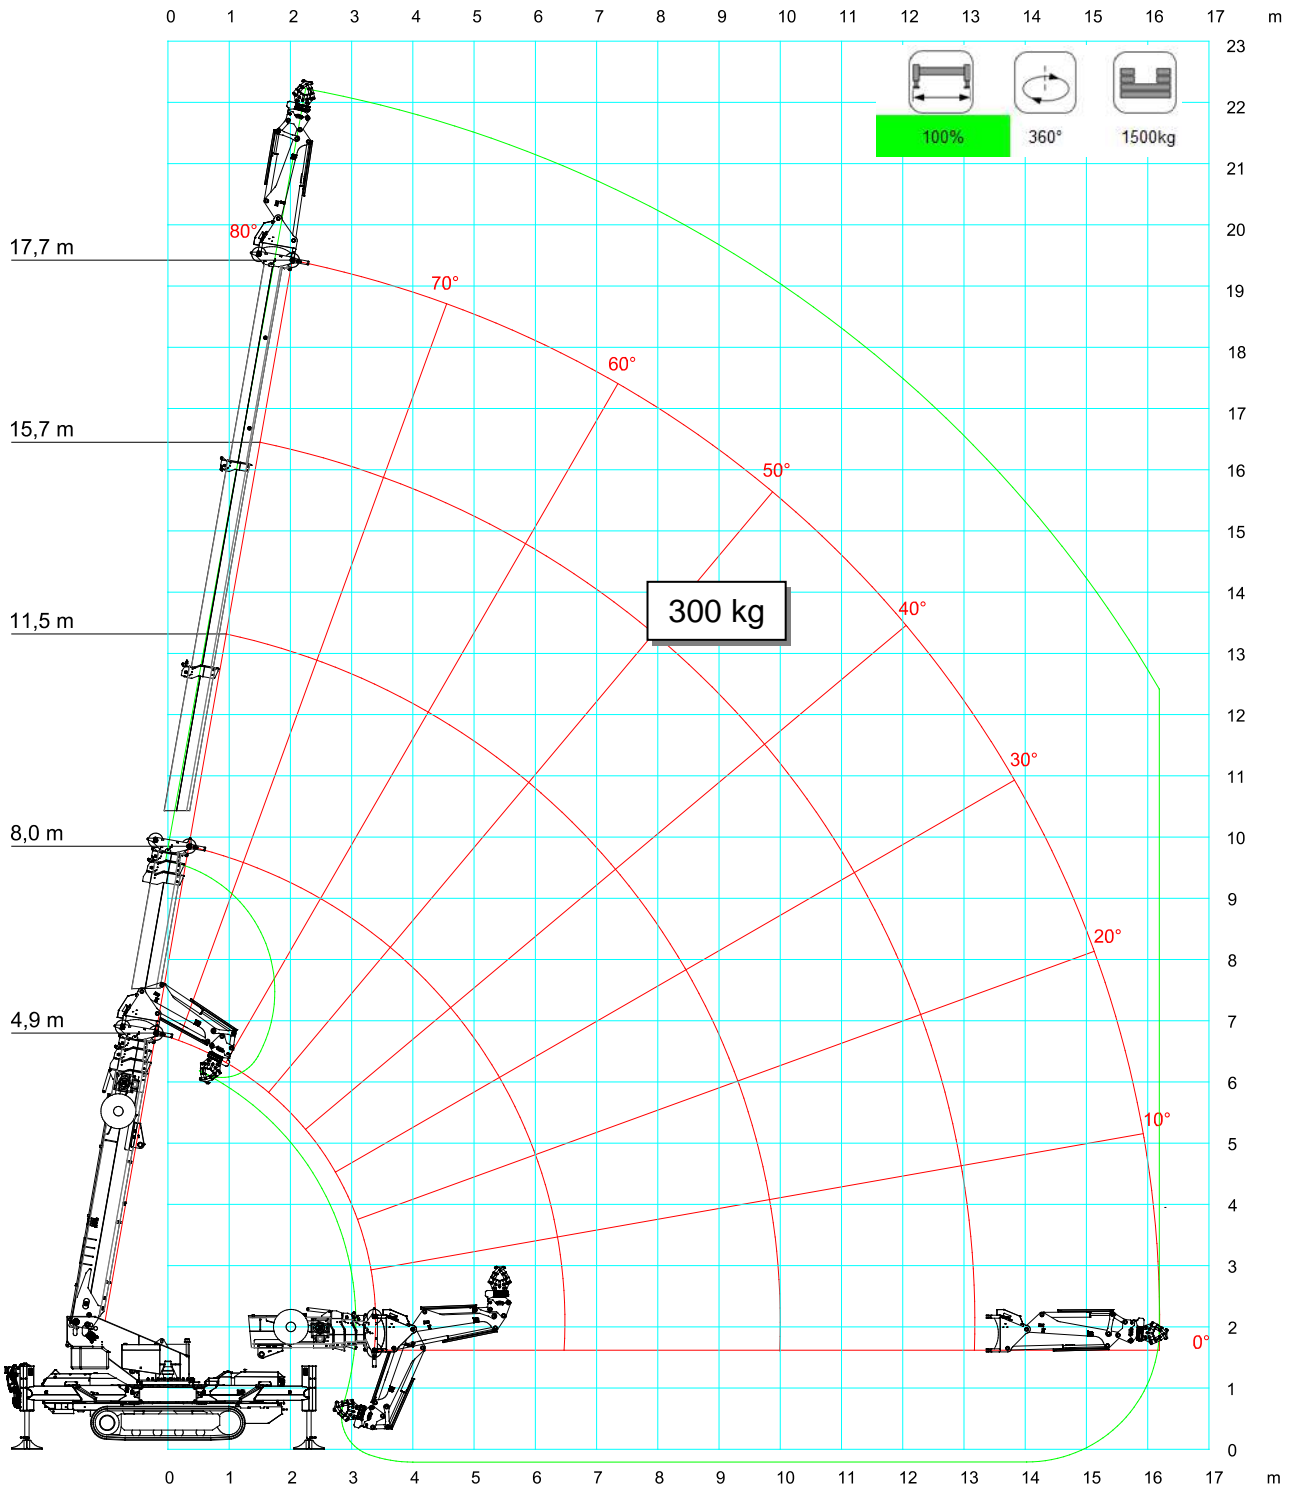




SPX1275CDH-2

SPX1275CDH-2 + JIB300GR

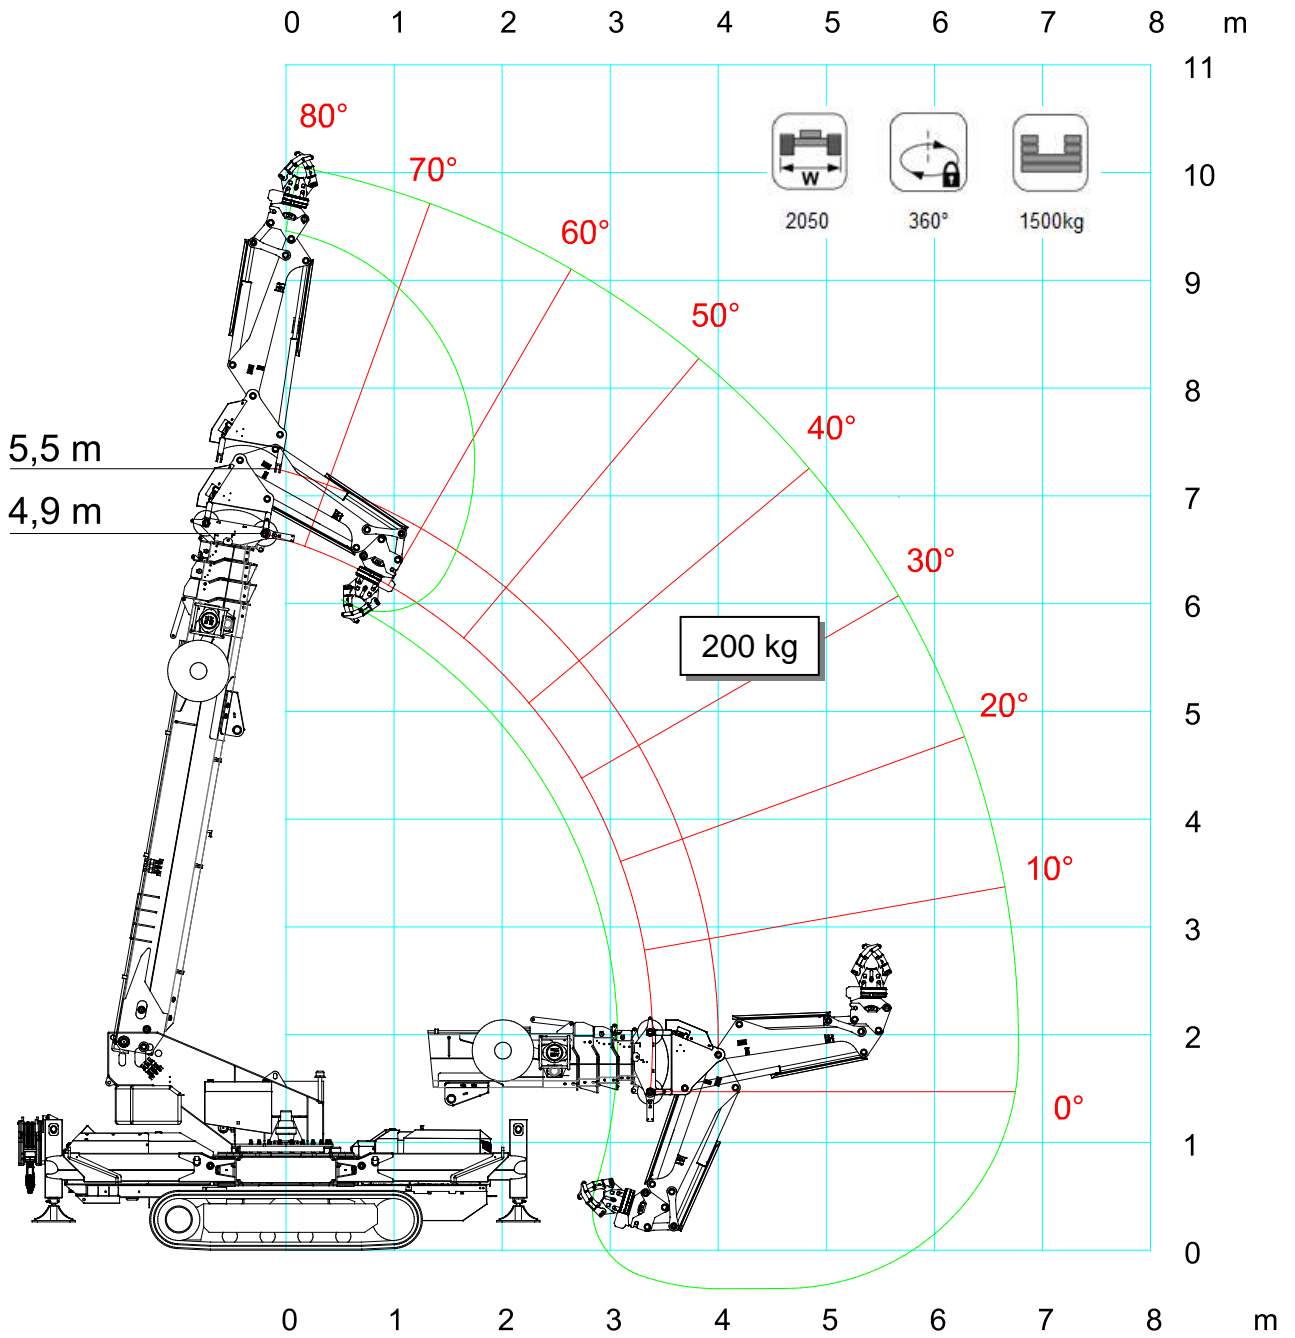

ACCESSORIES

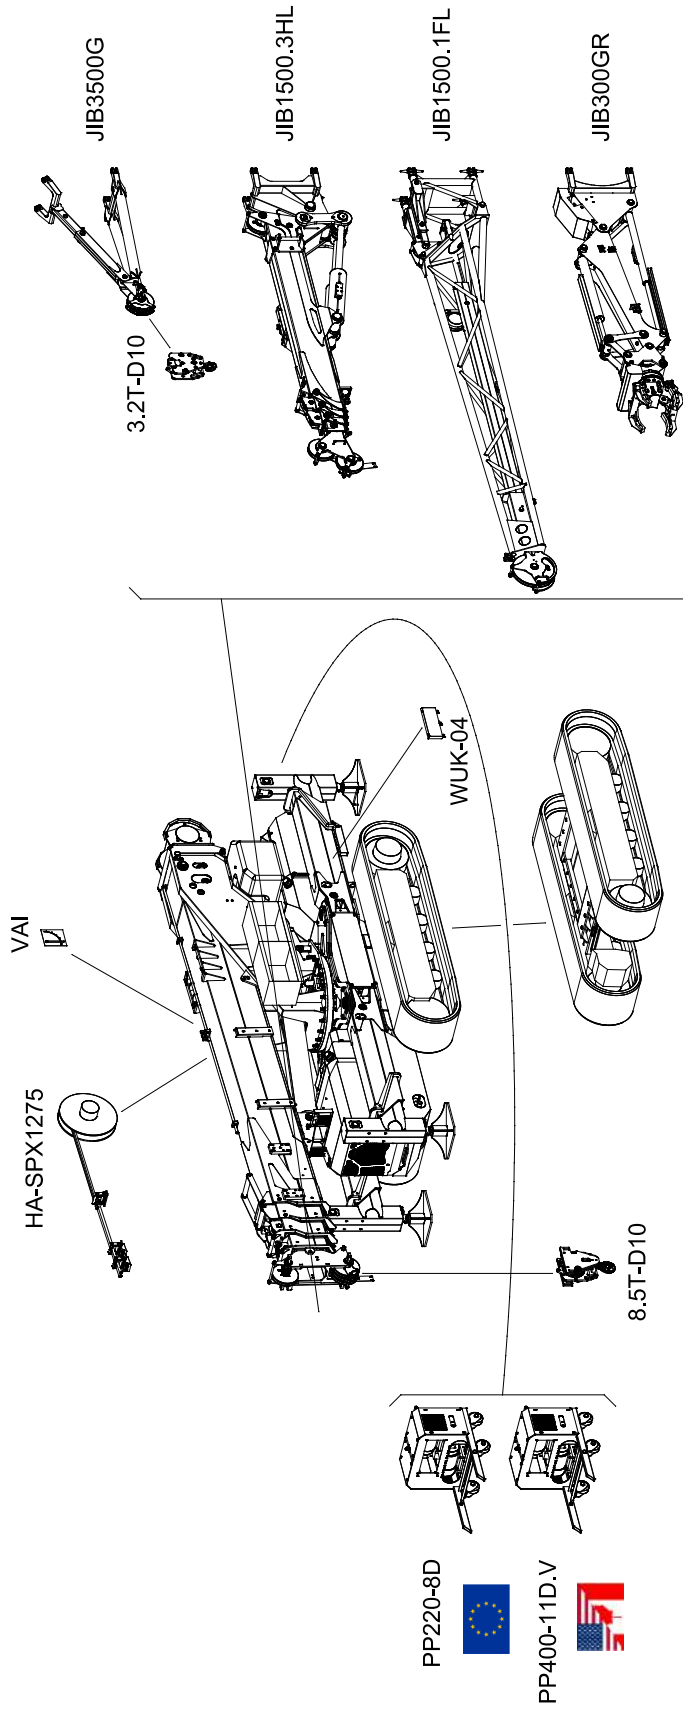


	STD	PC-01	PC-11
Boom, covers and outriggers	RAL2004	RAL_____	RAL_____
Chassis, frames and tanks	RAL7021	RAL7021	RAL_____


ACCESSORIES FEATURES

JIB3500G


HOOK (3,5Ton)

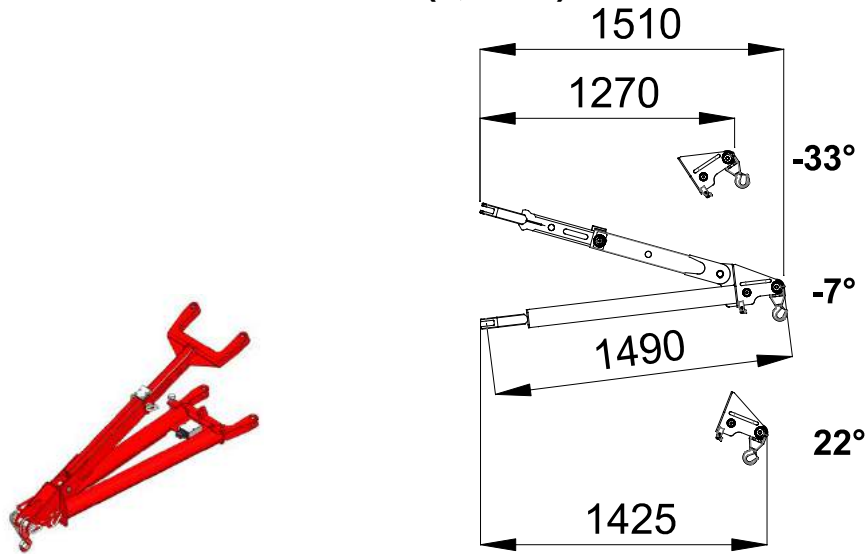


PULLEY (3Ton)

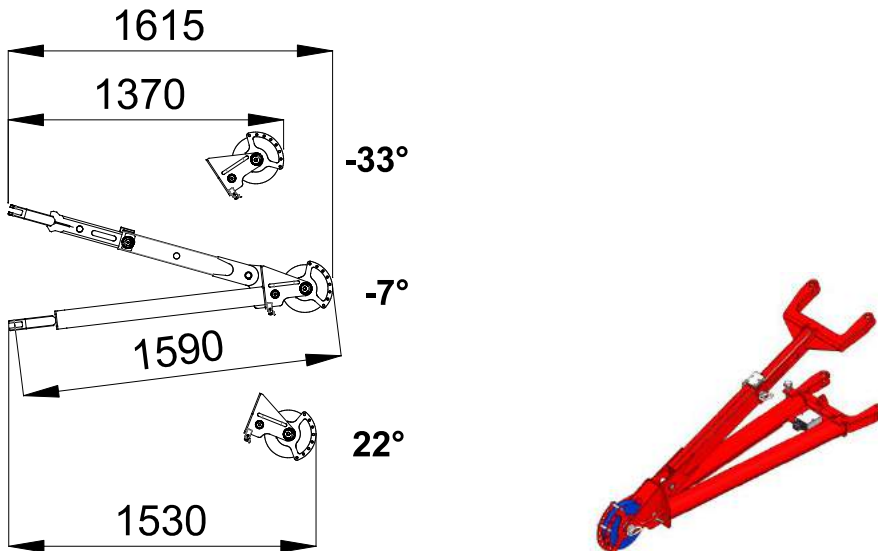







OUT SERVICE CONFIGURATION

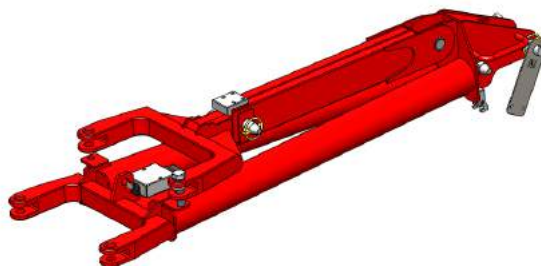

JIB1500.1FL





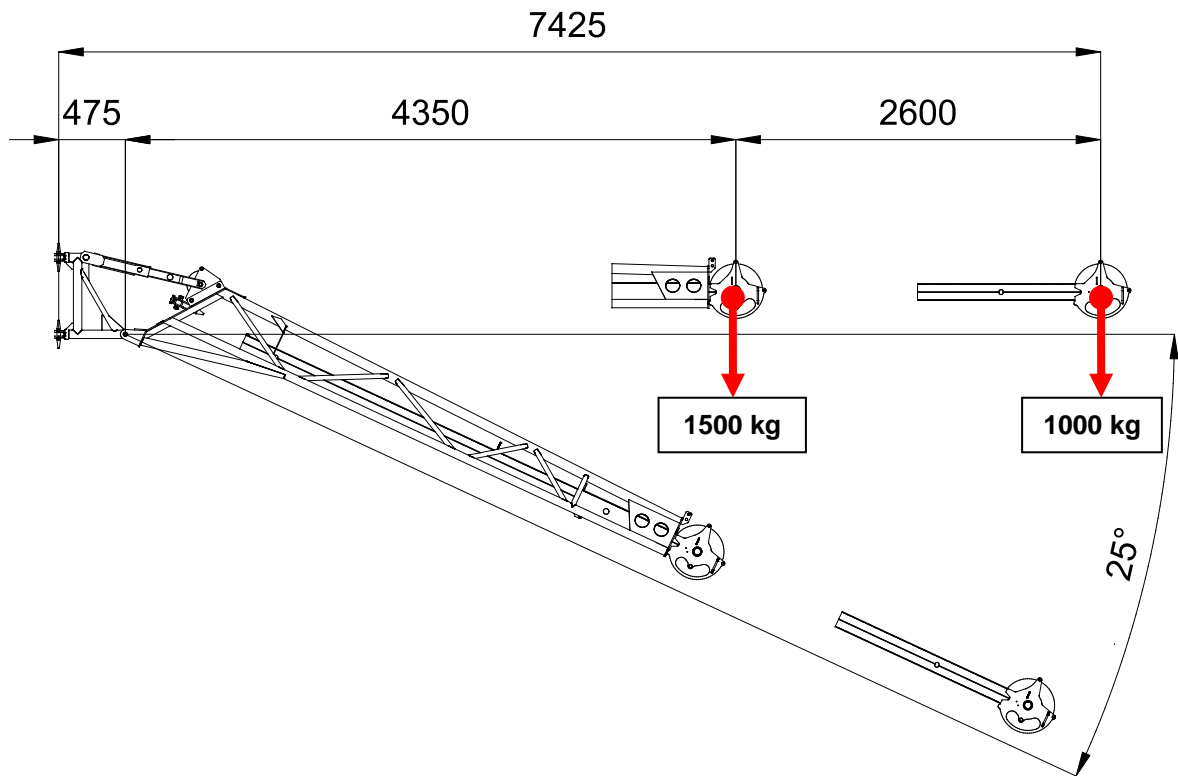


JIB1500.3HL

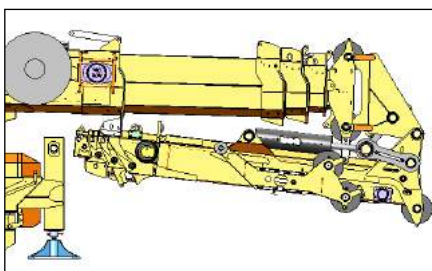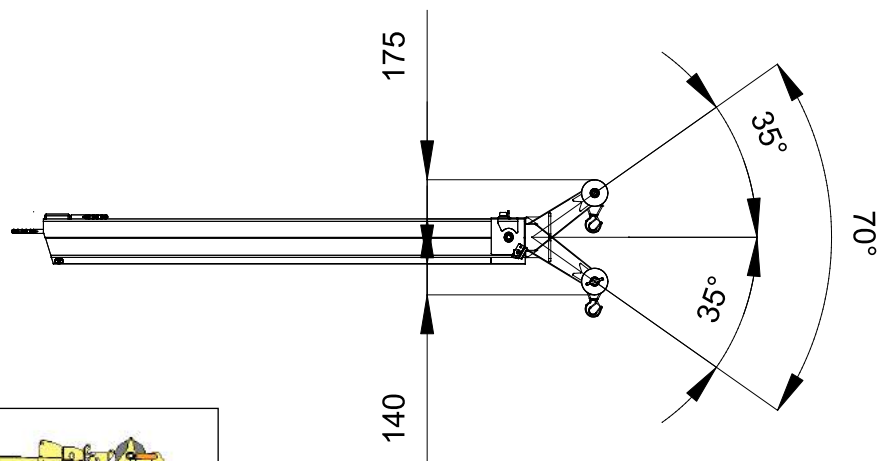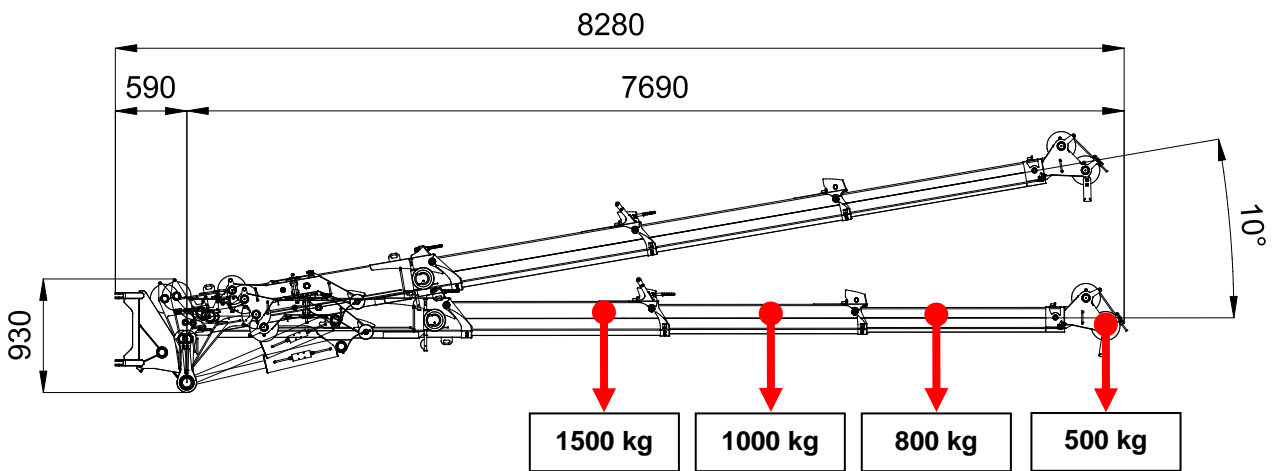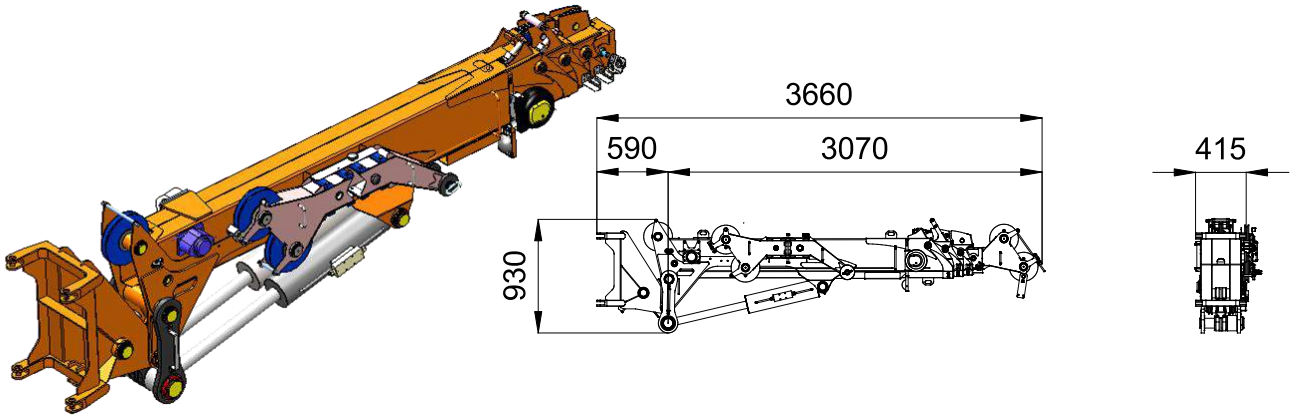

Fast out of service position

JIB300GR

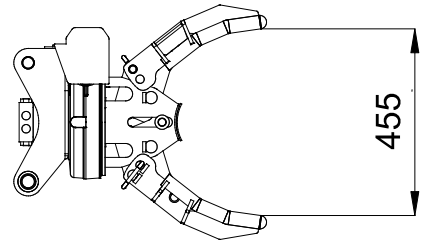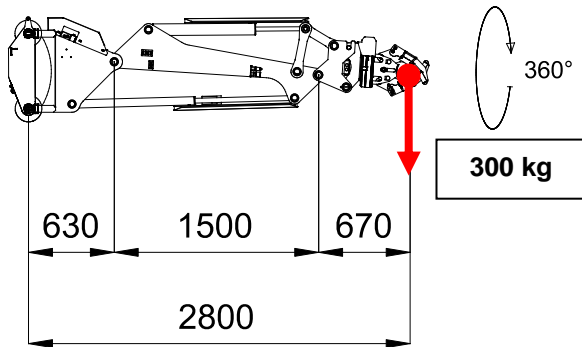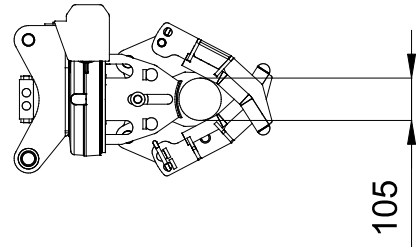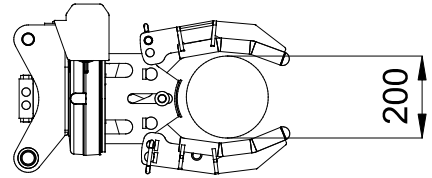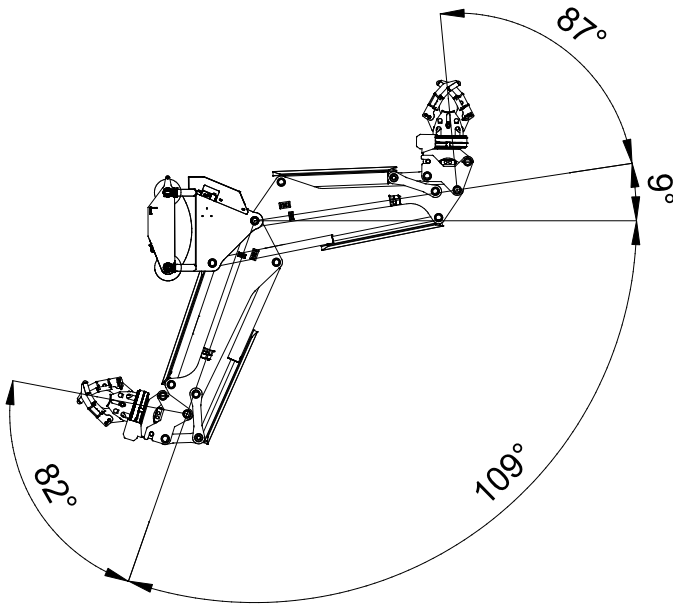

SYMBOLS

	Weight		Chart Wheels		Engine		Jib length and angle
	Counterweight		Minipicker		Diesel Fuel		Jib Length
	Crane		Back Wheel Point Loading		Gasoline Fuel		Jib Radius
	Travel Speed		Front wheel Point Loading		Tank		Hydraulic Jib Length
	Gradeability		Travel Speed		Battery		Hydraulic Jib Radius
	Outrigger Load		Gradeability		Power		Mechanical Jib Length
	Track Loading		Working Radius		Boom Angle		Mechanical Jib Radius
	Outriggers Setup		Hookblock		Boom Length		Manipulator Length
	Ext Tracks Width		Slewing		Boom Radius		Manipulator Radius
	Chart On Tracks		Slewing Locked		Jib Hook Radius		Maximum inclination of the machinery
	Jib on board		Without jib on board		Standard		Stabilizing bar
	Horizontal boom angle		Number of vacuum pads		Factory max. load		Building site max. load

Remarks referring to load chart

- The load charts are calculated according to EN 13000.
- For the calculation of the load charts at least a wind speed of 9m/s (33km/h) and regarding the load a sail area of 1m² per ton load and a wind resistance coefficient of 1.2 on the load have been taken into account. For lifting of loads with large sail areas and/or high wind resistance coefficients the maximum wind speed as stated in the load charts has to be reduced.
- Lifting capacities are given in kilograms.
- The weight of the hook blocks and hooks is part of the load and therefore it must be deducted from the lifting capacities.
- Working radii are measured from the slewing centre.
- The lifting capacities given for the telescopic boom apply if the folding jib is removed.
- Subject to modification of lifting capacities.



NOTES

A large, empty rectangular box with a thin black border, intended for handwritten notes.



NOTES

A large, empty rectangular box with a thin black border, intended for handwritten notes.



DEALER



JEKKO S.r.l. via Campardone, 1 Z.I. 31014 Colle Umberto (TV)
Italy tel. +39 0438 1710083 fax +39 0438 1710123
www.jekko.it - info@jekko.it